


Cañón FL6004C

- Diametro de aspersion: 16m - 32m.
- Presión: 0.5 - 3.5 bar.
- Flujo: 10 - 21L/min.
- Rosca: Macho 3/4".
- Resorte & Pin de acero inoxidable
- Materiales de alta resistencia POM.
- Boquilla estandar gris 3.2mm x 2.5mm.
- Empaques y boquillas intercambiables
- Auto-Compensado de alta eficiencia.



Tobera: 3.2*2.5mm.

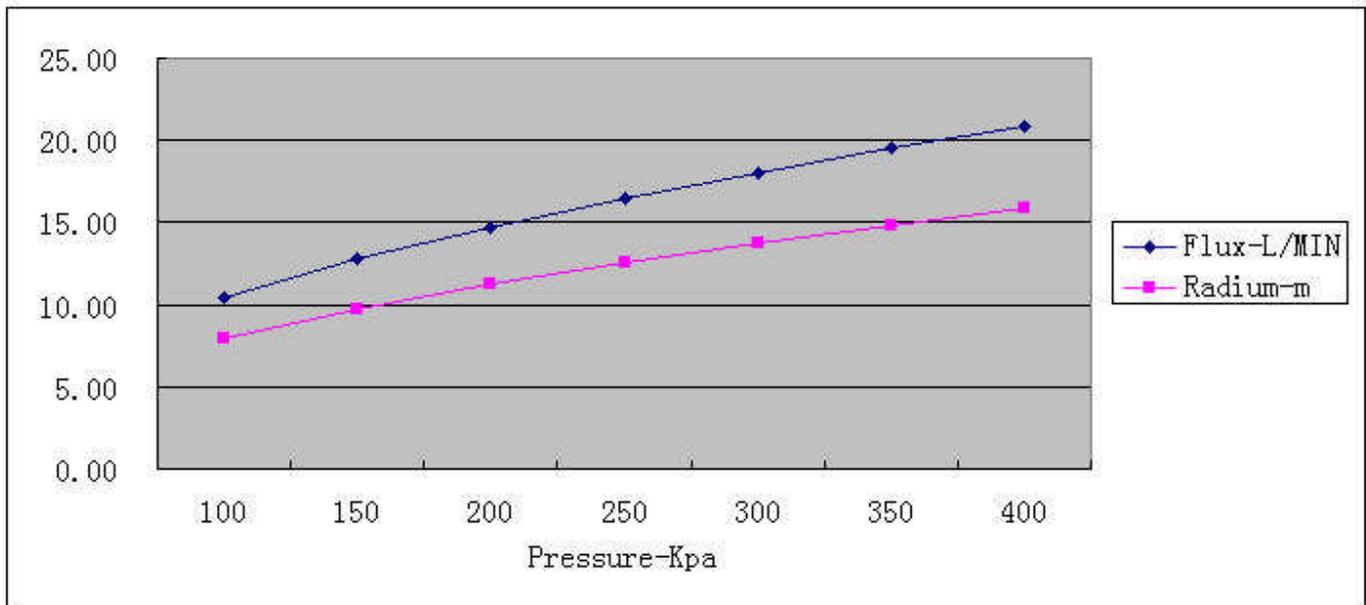

Pressure-Kpa	100	150	200	250	300	350	400
Flux-L/MIN	10.43	12.77	14.75	16.49	18.06	19.51	20.86
Radium-m	7.92	9.70	11.20	12.52	13.72	14.82	15.84