


LOVOL

MODEL : 1006TAG

1500RPM TEST

Aspiration : Turbocharged & inter-cooled , Configuration: In-line 6 Cylinder,
Bore : 100mm Stroke : 127mm Displacement : 5.99L

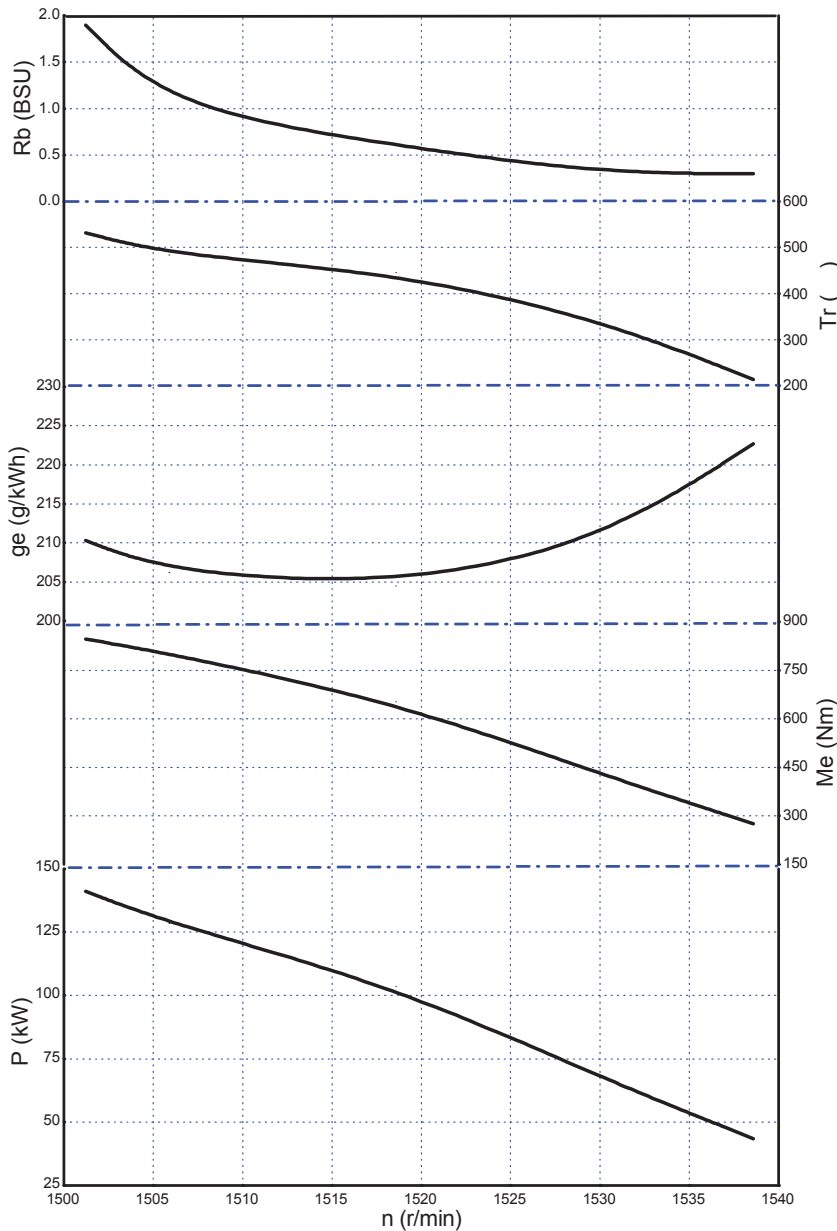

speed	power
r/min	kW
1538.6	43.5
1530	67.6
1518.6	103.7
1505.9	128.5
1501.2	136.5
speed	torque
r/min	Nm
1538.6	276.7
1530	428.7
1518.6	652.1
1505.9	802.0
1501.2	847.2
speed	Specific fuel consumption
r/min	g/kWh
1538.6	222.7
1530	210.0
1518.6	204.5
1505.9	206.2
1501.2	210.3

Remarks : Fuel pump : PB Turbocharger TBP4

Item	Parameter	Accessories	Exhaust air
Rating Standard	GB/T6072.1-2000	With fan Alternator & compressor idle speed	Smoke intensity at rated speed : ≤ 3
Atmospheric Pressure	101.3 kPa		
Ambient Temperature	25		
Intake Pressure Difference	5.0 kPa		
Exhaust Back Pressure	10.2 kPa		
Power Tolerance	± 3%		
Torque Tolerance	± 3%		