


Matrimonios UL



Matrimonios / Acoples industriales tipo Llanta

MODEL	T _n	T _{Max}	RPM MAX	d	L		D	B	Weight	kg.m ²
	N.m	N.m			J J ₁	Y			kg	
UL1	10	31.5	5000	11-16	22-30	25-42	80	20	0.7	0.0003
UL2	25	80	5000	14-22	27-38	32-52	100	26	1.2	0.0008
UL3	63	180	4500	18-25	30-44	42-62	120	32	1.8	0.0022
UL4	100	315	4300	20-30	38-60	52-82	140	38	3	0.0044
UL5	160	500	4000	24-35	38-60	52-82	160	45	4.6	0.0084
UL6	250	710	3600	28-40	44-84	62-112	180	50	7.1	0.0164
UL7	315	900	3200	32- 48	60-84	82-112	200	56	10.9	0.029
UL8	400	1250	3000	38-50	60-84	82-112	220	63	13	0.0448
UL9	630	1800	2800	42 -60	84-107	112-142	250	71	20	0.0898
UL10	800	2240	2400	45- 70	84-107	112-142	280	80	30.6	0.1596
UL11	1000	2500	2100	50- 75	84-107	112-142	320	90	39	0.2792
UL12	1600	4000	2000	55-80	84-132	112-172	360	100	59	0.5356
UL13	2500	6300	1800	63- 95	107-132	142-172	400	110	81	0.896
UL14	4000	10000	1600	75-110	107-167	142-212	480	130	145	2.2616
UL15	6300	14000	1200	85-125	132-167	172-212	560	150	222	4.6456
UL16	10000	20000	1000	100- 140	167-202	212-252	630	180	302	8.0924
UL17	16000	31500	900	120-160	167-242	212-302	750	210	561	20.0176
UL18	25000	50000	800	140-180	202-242	252-302	900	250	818	43.053

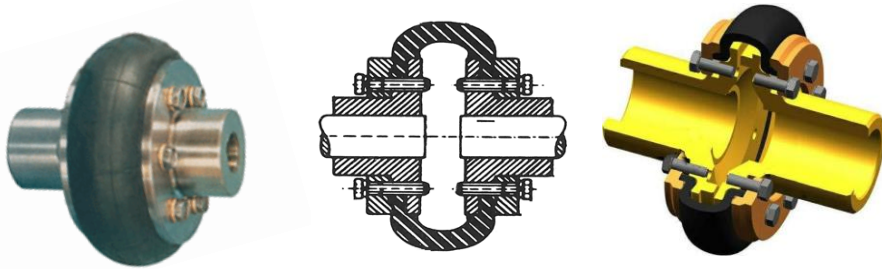